Total section A-A

through the east and west mid-span buttresses, looking north

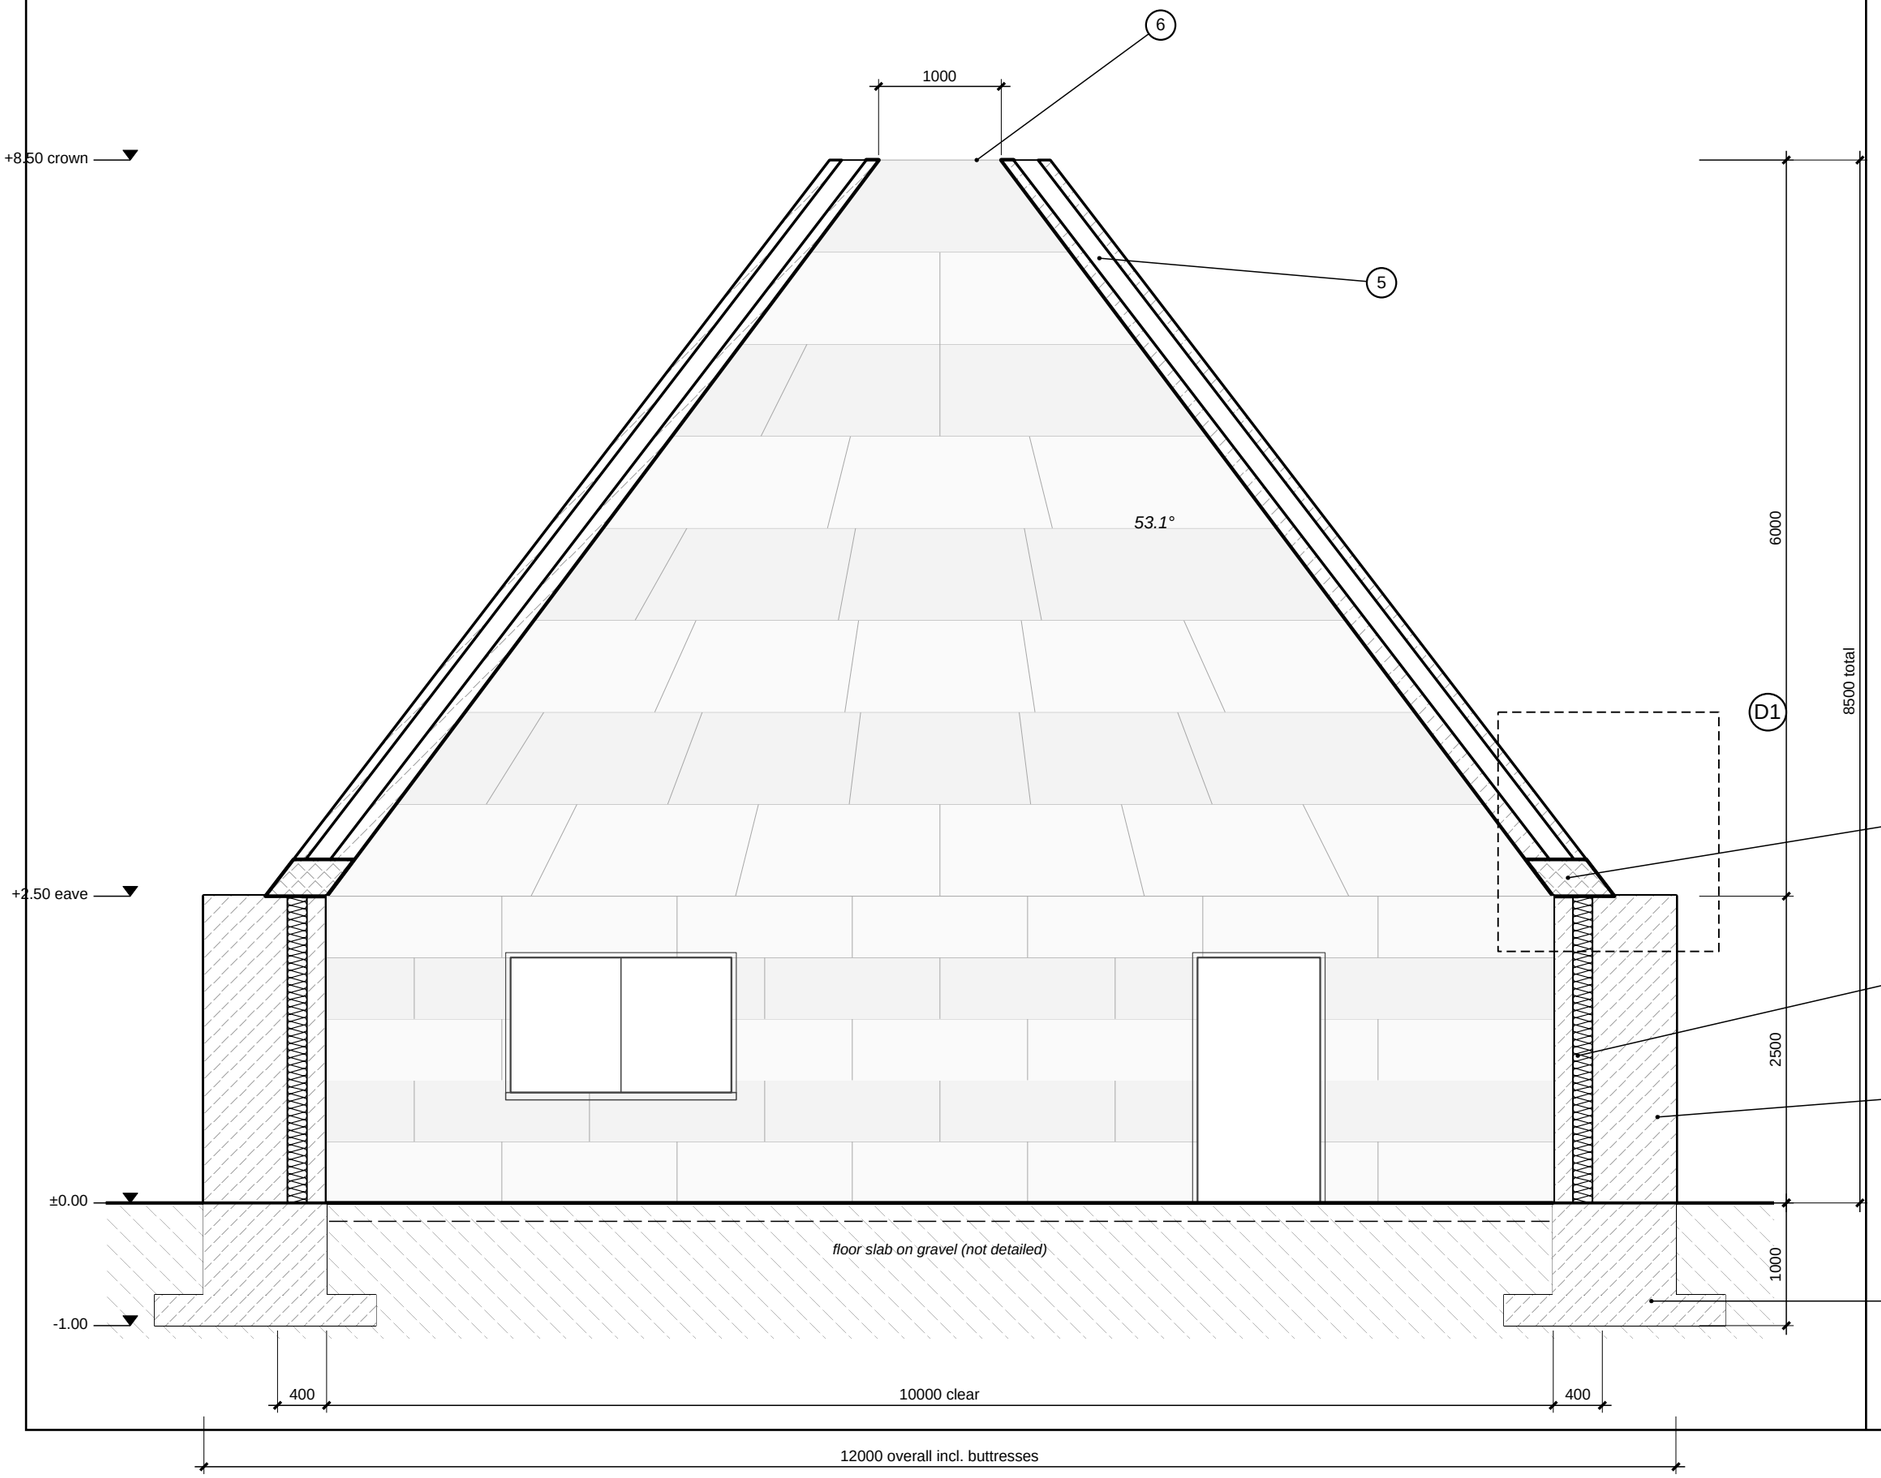

1 Footing 1800 x 250, underside at -1000 (frost depth and bearing are guesses).

2 Printed wall 400, same pattern as the roof: two 80 inner layers, a 160 air zone, an 80 outer layer.

3 Solid base of the roof: the first 300 (vertical) above the eave is completely solid concrete, 400 wide, no air zone; there is no ring beam.

4 Buttress 400 wide, 1000 from the inner face (600 beyond the wall); it rises to +2.50, flush with the roof base.

5 Roof shell: 400 thick square to the slope at the base (two 80 inner layers, a 160 air zone, an 80 outer layer), 320 at the crown; about 500 / 400 horizontally.

6 Crown opening 1000 clear; roof rises 6000 over 4500, slope 53.1° (36.9° from the vertical).

● from your sketches

○ assumed by me, to confirm

Notes

Layer pattern from your drawing; at the crown the second inner layer ends, so the leaf is 80 there (assumed).

The cut runs through the mid-span buttresses; the north wall with its door and window is seen beyond.

Faint grid on the back roof face and the north wall = printed pieces in running bond, about 1500 wide, 800 high on the roof and 440 on the wall (assumed sizes).

0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered