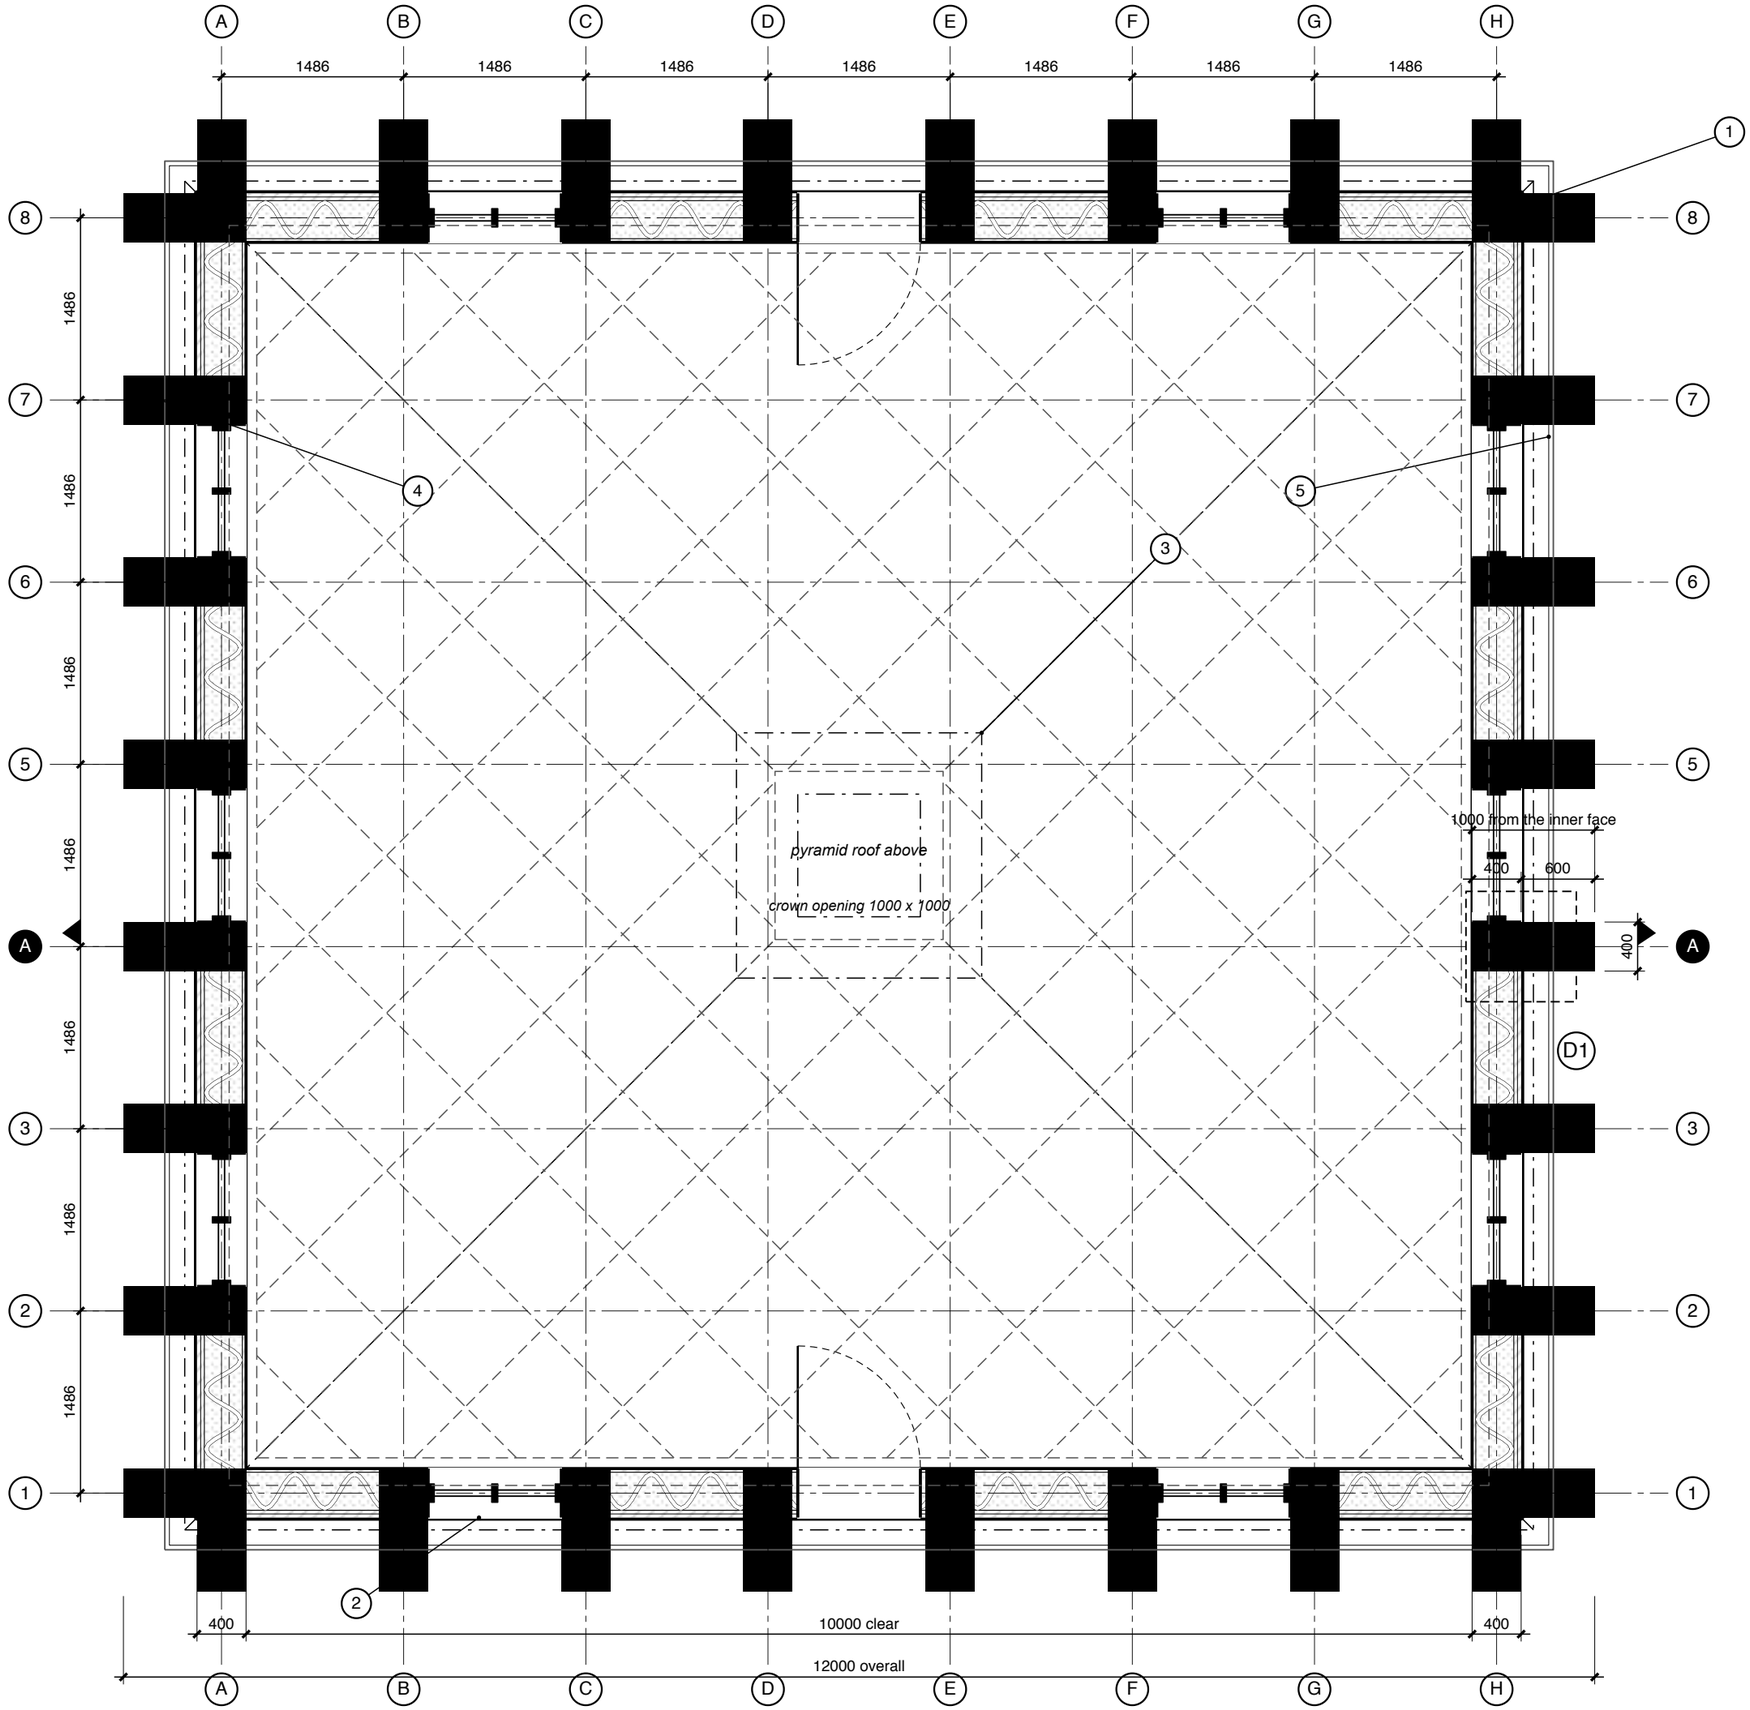



# Floor plan · roof grid B

10 x 10 m clear · buttress every 1.5 m · printed walls

1. Printed wall 400 (= roof base width), room side out: inner bead 30, lattice zone 310 (wavy bead 30 with insulation between its loops, dotted), 2 outer beads 30. Buttresses solid black: 400 wide (same as the wall), 1000 deep from the inner face (flush with the wall inside), so they project 600 outside; one about every 1.5 m (7 bays of 1486 on the wall centreline, 8 per side, corners included).
2. Every other bay (the 2nd, 4th and 6th) is a full-height curtain wall, the whole bay between two buttresses; the middle bay of the south and north walls has a 1000 door instead. The other bays stay printed wall. Positions and sizes are placeholders.
3. Pyramid roof above (dashed): 1000 x 1000 clear crown opening, hips to the corners; the roof is 400 thick square to the slope from eave to crown, so the shell ends 100 outside the wall face, and 262 with the insulation and outer layer.
4. Buttress axes 1486 apart along each wall (centre to centre), corners included.
5. Roof build-up outside the shell (outline at the eave): insulation 100 (very thin line), then the outer layer 30.
6. Cast ribs of roof grid B seen from above (dashed), with the bottom ring (the 300 solid base) and the horizontal / top rings.

**Notes**

Section A-A cuts through the 4th buttress from the south on the east and west walls (y = -743).

Detail D1 is the eave at the east buttress on that cut.

0 1 2 3 4 m

**Pyramid roof · 3D-printed concrete · GSAPP**

Scale 1:50 at A3 · dimensions in mm

2026-10-14 · hand estimates, not engineered

**03**