


Option B

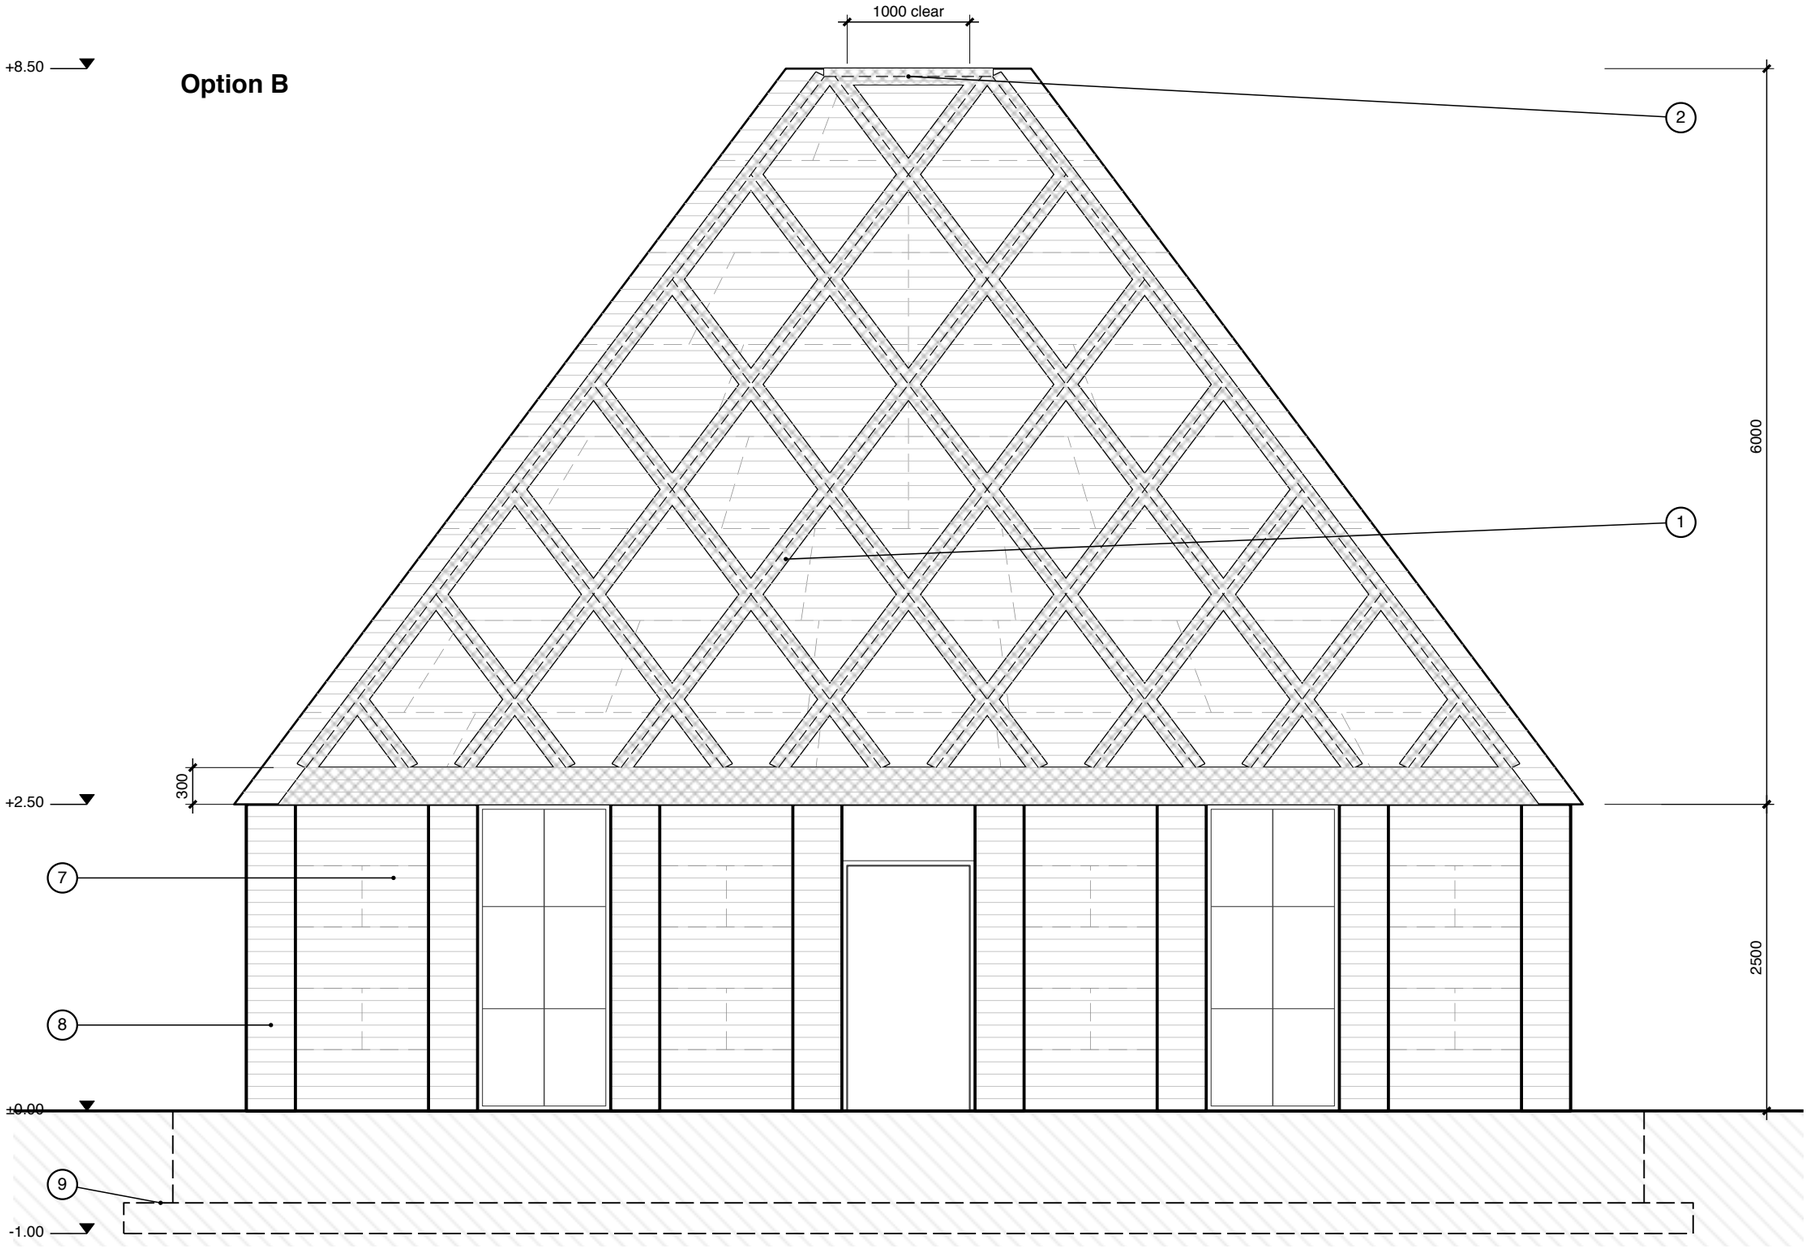

Plan cut through a rib at one layer, 1:10

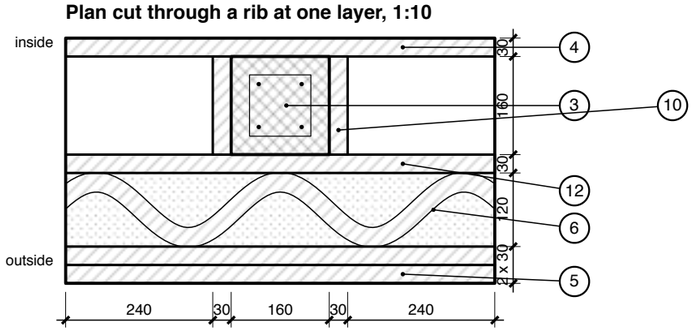

Section along a rib at the eave, 1:20

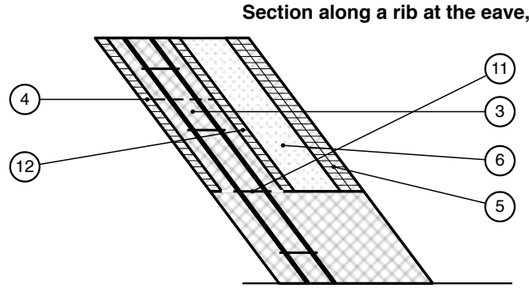

Roof grid B: diamond lattice

one roof face seen square on

1. Diagonals parallel to the two hips (same inclination as the roof edges, 59.0° in the face), every 1284 along the base: equal diamonds 1284 wide.
2. Bottom ring = the 300 solid base; top ring at the crown. The hips are two of the diagonals. No other horizontal ribs.
3. Rib (column) 160 wide x 160 deep in the rib zone, between the inner and the middle bead: the printed channel stays as formwork, filled with cast concrete; 4 Ø16 + Ø8 stirrups every 200 (assumed), or fibre concrete (see notes).
4. Inner bead 30: continuous, covers the grid on the room side.
5. 2 outer beads 30: continuous, the outside of the printed shell, exposed concrete (no insulation or cladding outside).
6. Lattice zone 120: wavy printed bead 30 touching the middle and the outer beads in turn, insulation between (dotted).
7. Printed wall 400, to +2.50: inner bead 30, lattice zone 310 (wavy bead + insulation), 2 outer beads 30.
8. Buttresses 400 wide, 1000 from the inner face (600 outside), about every 1.5 m (7 bays of 1486 on the wall centreline, 8 per side, corners included); every other bay is printed wall, the bays between are full-height curtain wall (door in the middle one).
9. Strip footing 1800 x 250, underside at -1.00 (hidden, dashed): printed edge formwork, cast core.
10. Printed channel walls 30 each side of the rib, from the inner to the middle bead: permanent formwork. Between the ribs the rib zone is an empty cavity.
11. Poured core: the solid base (300, full concrete over the whole 400) and the rib in one pour, lifts of about 600 from the eave (assumed, dashed), no joint between base and rib. Printed layer joints every 10 (drawn every 20).
12. Middle bead 30: closes the rib zone outside; inner and middle bead are the structural skins, the ribs the webs (as in the Karamba model).

Notes

Every diagonal ends on a ring or on a hip, so no bar has a free end in the shell.

Diagonals do not stop as the roof narrows: the diamonds just get clipped by the hips.

Dashed lines = printed pieces in running bond (about 1500 x 750); very faint lines = printed layer joints (10 mm layers, drawn every 100).

Printed mortar beads are permanent formwork; ribs, base and buttress cores are poured concrete (after the Obayashi 3dpod paper, 2023). Steel-fibre concrete could replace the rib bars, to be confirmed by the engineer.

Rough quantities, four faces: ribs 326 m, steel 2055 kg (4 Ø16 per rib), poured concrete 8.3 m3.

0 1 2 3 4 m

Pyramid roof · 3D-printed concrete · GSAPP

Scale 1:50 at A3 · rib plan cut 1:10, rib section 1:20 · dimensions in mm

2026-10-14 · hand estimates, not engineered

09