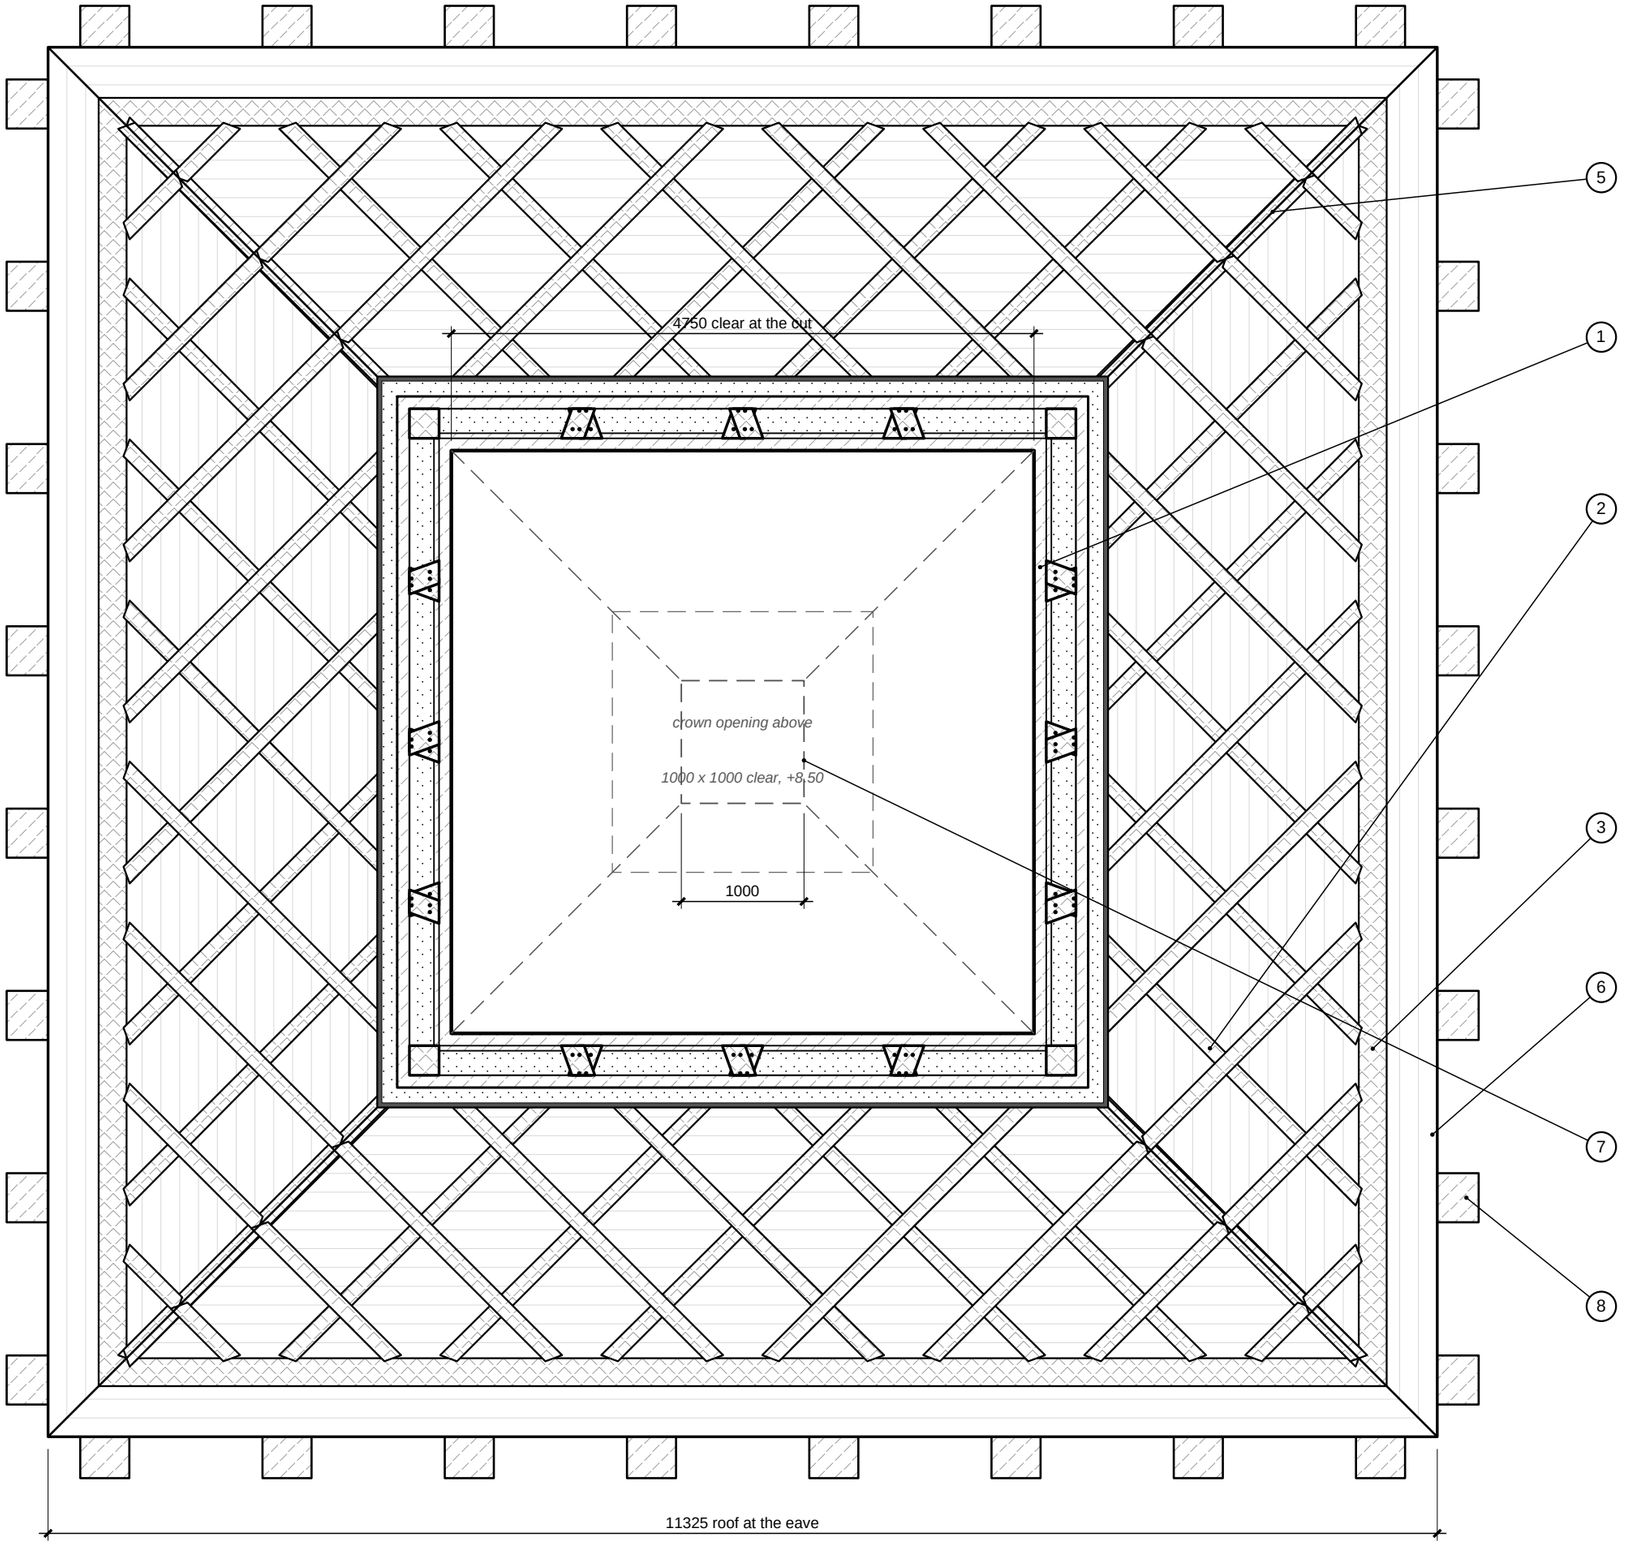


Roof plan, cut at +6.00 · grid B

horizontal cut through the roof, looking down on the ribs

1. Cut at +6.00 (3500 above the eave, just below the horizontal rib at +6.13): printed layers, air zone, cast ribs cut (crossed hatch), outer layer, insulation 100 and outer layer 30.
2. Ribs of grid B seen below the cut: the two families of diagonals from the base ring at the eave up to the cut and the hips.
3. Base ring: the 300 solid base at the eave (+2.50 to +2.80).
4. No horizontal ribs in grid B between the base ring and the top ring.
5. Hips: ribs from the corners of the eave up to the cut; dashed above it, up to the crown opening.
6. Roof edge at the eave (outside of the 30 outer layer). Very faint squares = printed layer joints (real layers 10, drawn every 200 in height).
7. Above the cut (removed, dashed): hips and the crown opening at +8.50, 1000 clear inside (1400 at the middle of the shell, 2125 outside the outer layer).
8. Buttresses below the roof: their ends show beyond the roof edge; the wall under the roof is dashed.

Notes

Matches the roof-grid elevations: same rib geometry, same levels (+4.31, +6.13, +7.77 for the horizontal ribs of grid A).

The ribs lie inside the shell, between the printed inner layers and the outer layer; here they are drawn as if the outer layer, insulation and cladding were transparent.

0 1 2 3 4 m

Pyramid roof · 3D-printed concrete · GSAPP
Scale 1:50 at A3 · dimensions in mm
2026-10-14 · hand estimates, not engineered

07