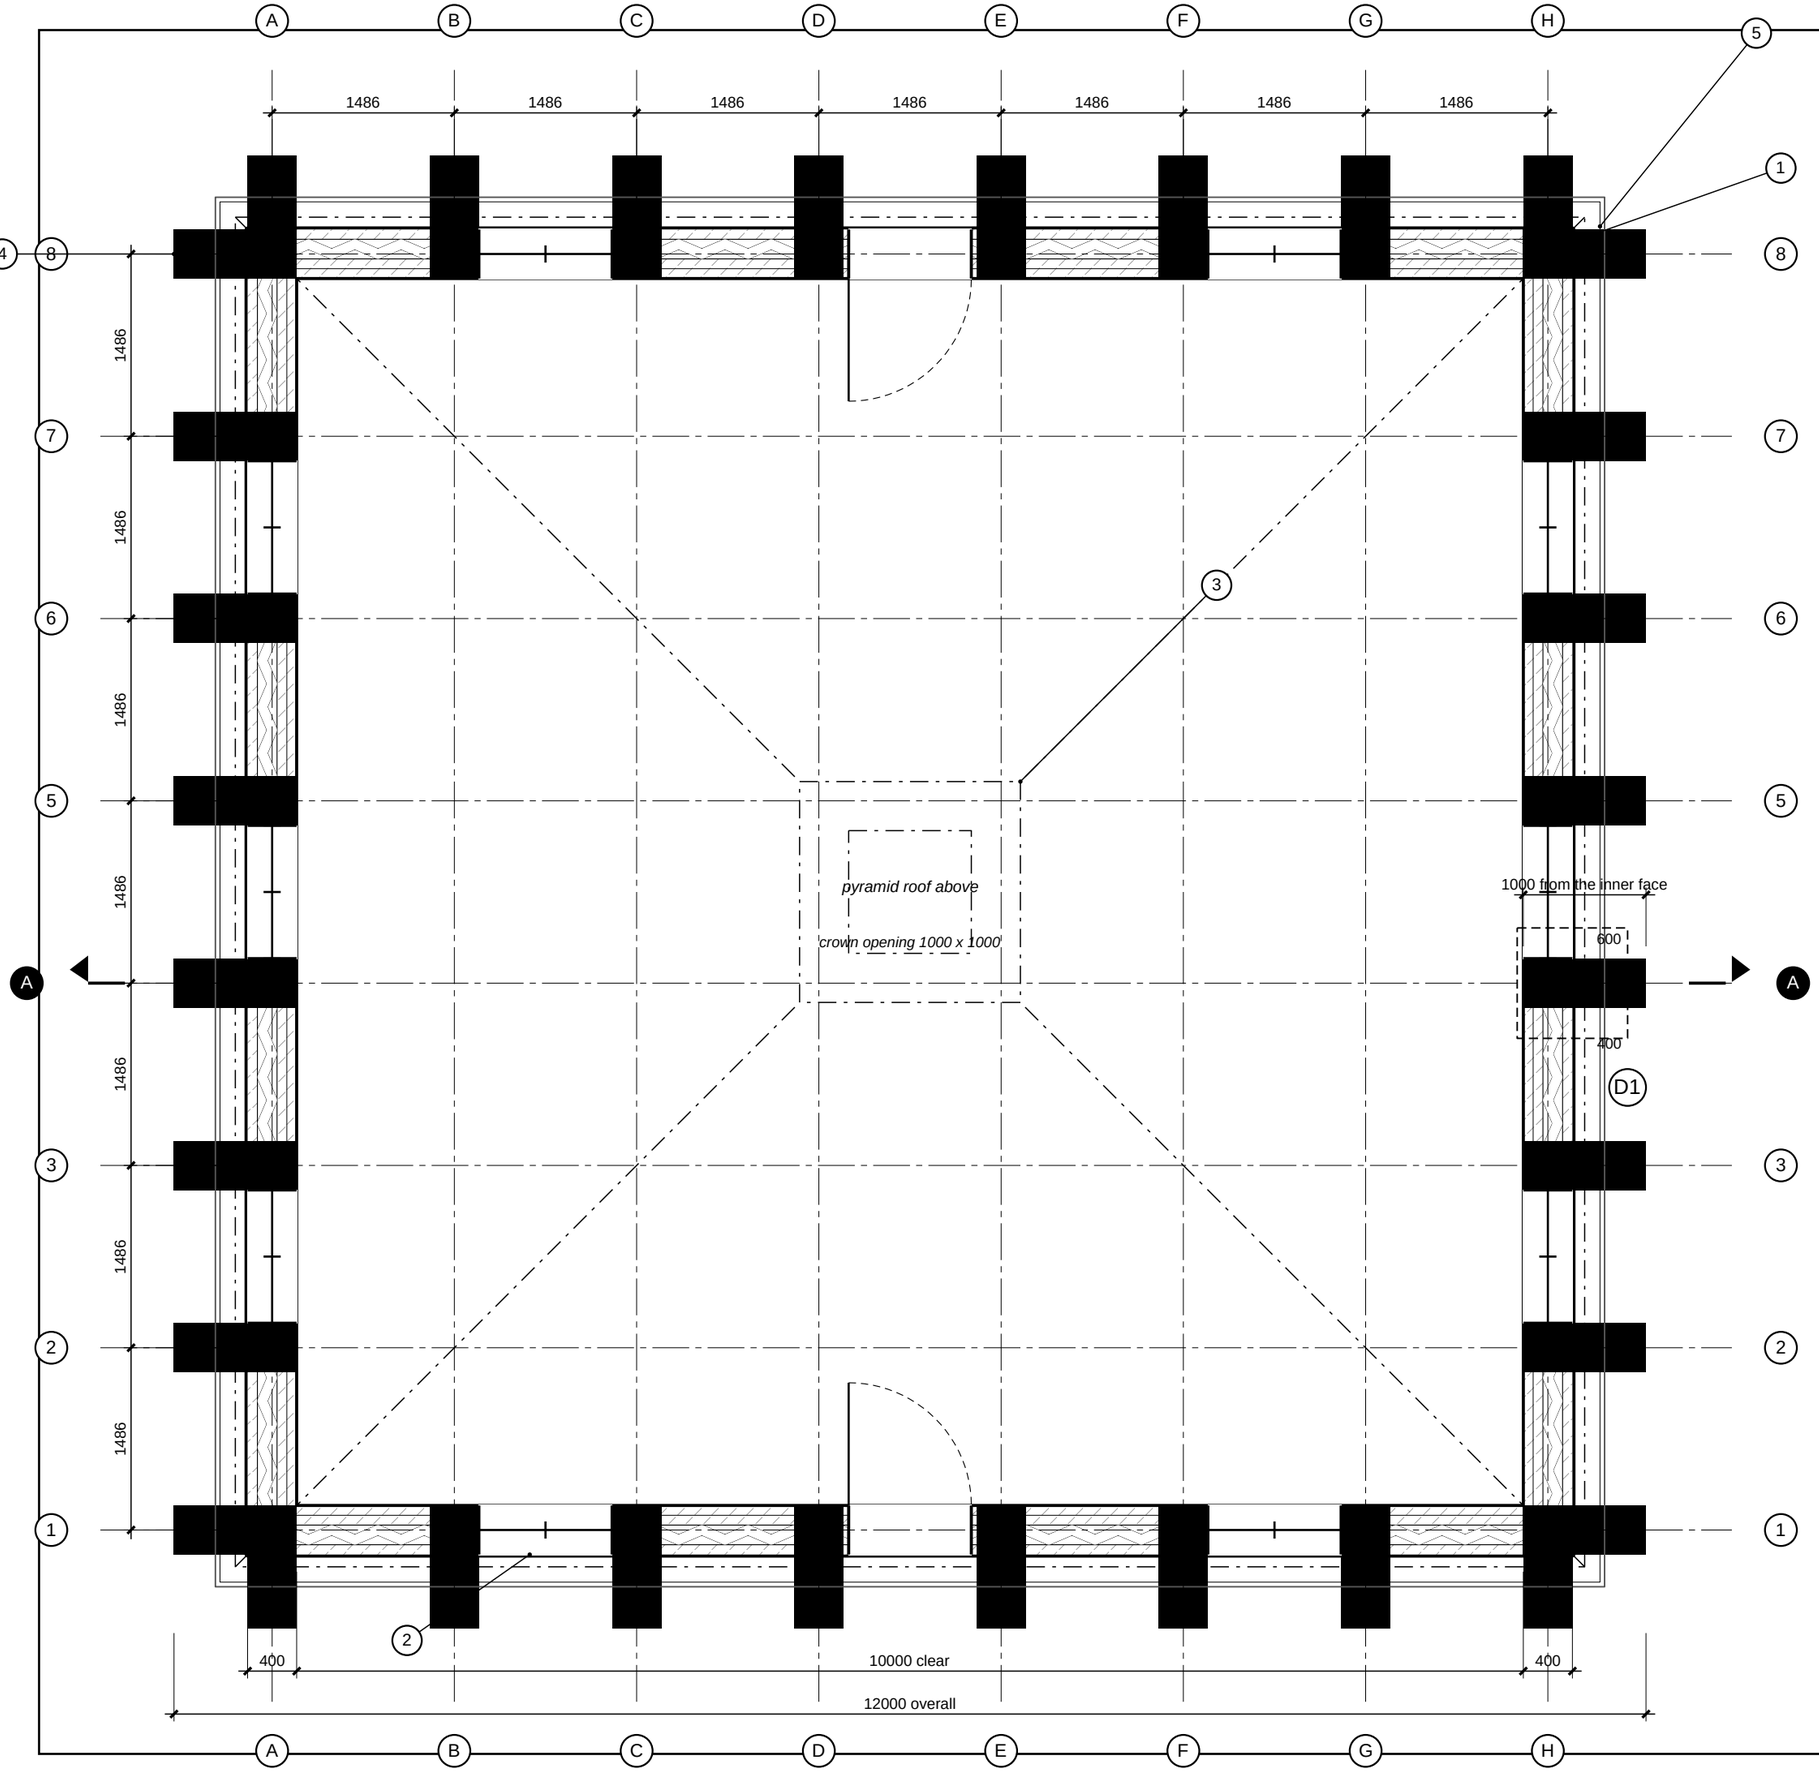

Floor plan

10 x 10 m clear · buttress every 1.5 m · printed walls

1. Printed wall 400 (= roof base width). Buttresses solid black: 400 wide (same as the wall), 1000 deep from the inner face (flush with the wall inside), so they project 600 outside; one about every 1.5 m (7 bays of 1486 on the wall centreline, 8 per side, corners included).
2. Every other bay (the 2nd, 4th and 6th) is a full-height curtain wall, the whole bay between two buttresses; the middle bay of the south and north walls has a 1000 door instead. The other bays stay printed wall. Positions and sizes are placeholders.
3. Pyramid roof above (dashed): 1000 square crown, hips to the corners, roof base 400 thick square to the slope, so its outer edge lands about 59 outside the wall face.
4. Buttress axes 1486 apart along each wall (centre to centre), corners included.
5. Roof build-up outside the shell (outline at the eave): insulation 100 (very thin line), then the outer layer 30.

● from your sketches
○ assumed by me, to confirm

Notes

Section A-A cuts through the 4th buttress from the south on the east and west walls (y = -743).

Detail D1 is the eave at the east buttress on that cut.

0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered