Detail D1: eave, roof to wall

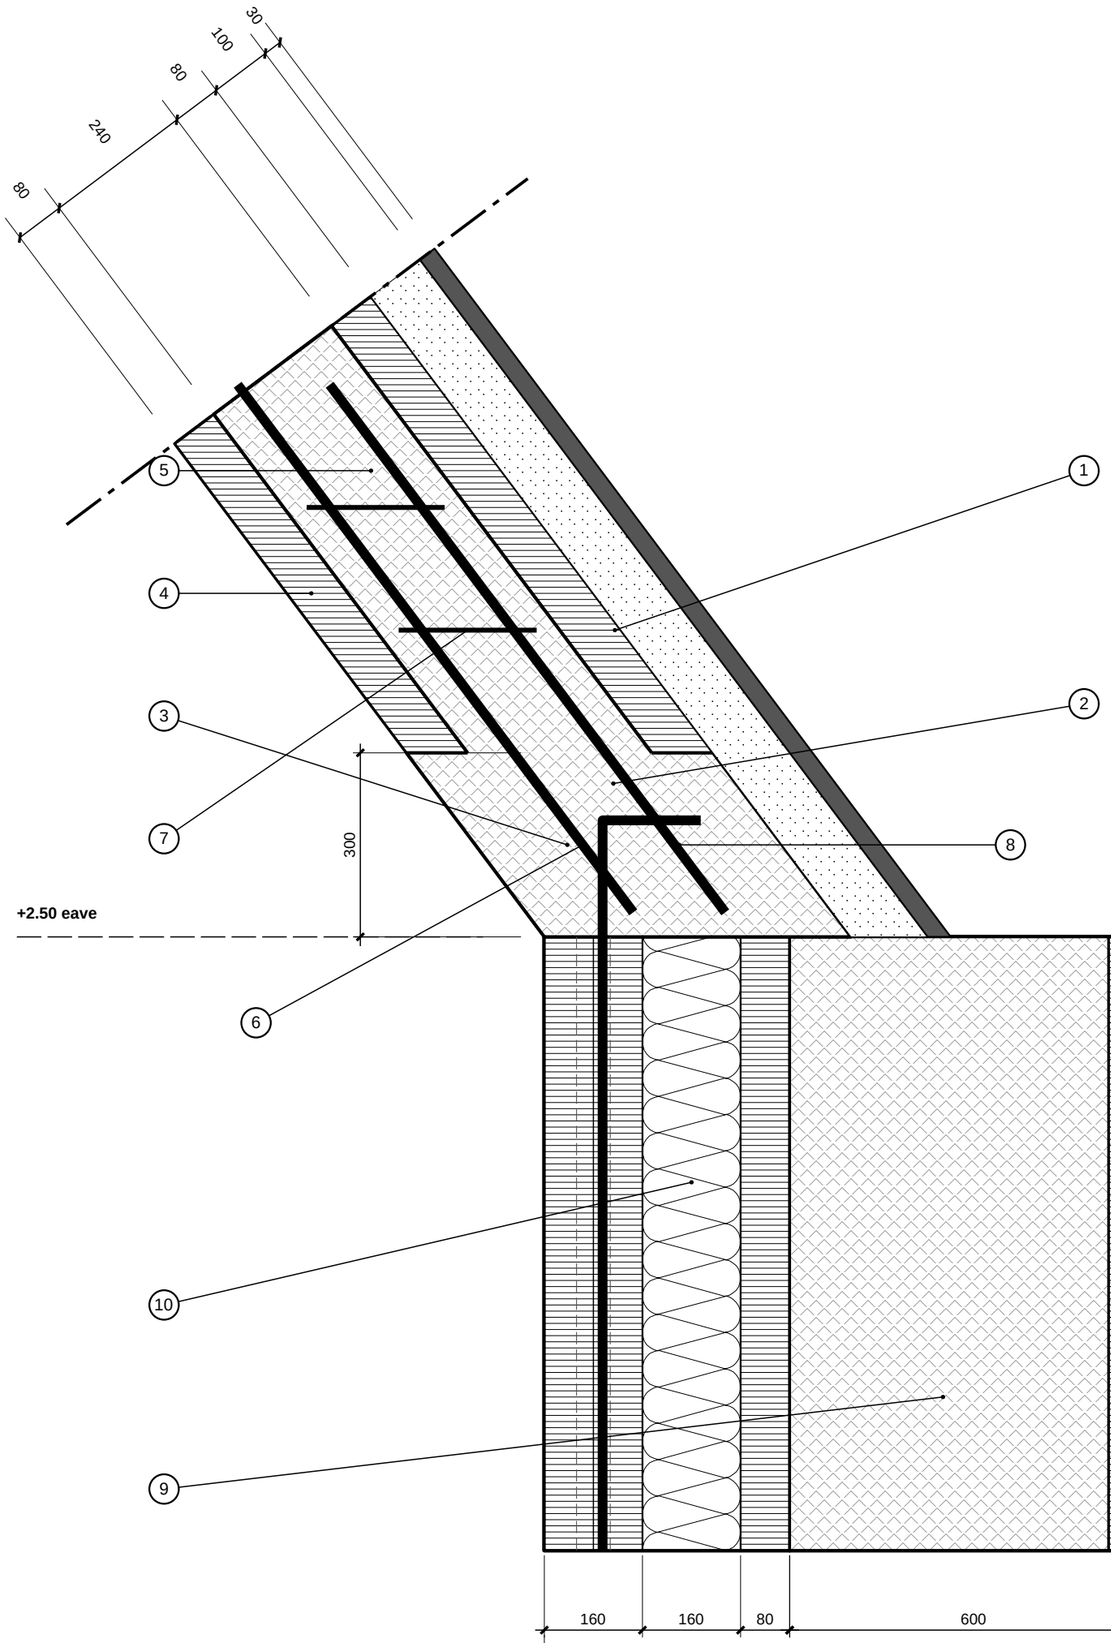

Plan cut through a rib at one layer, 1:5

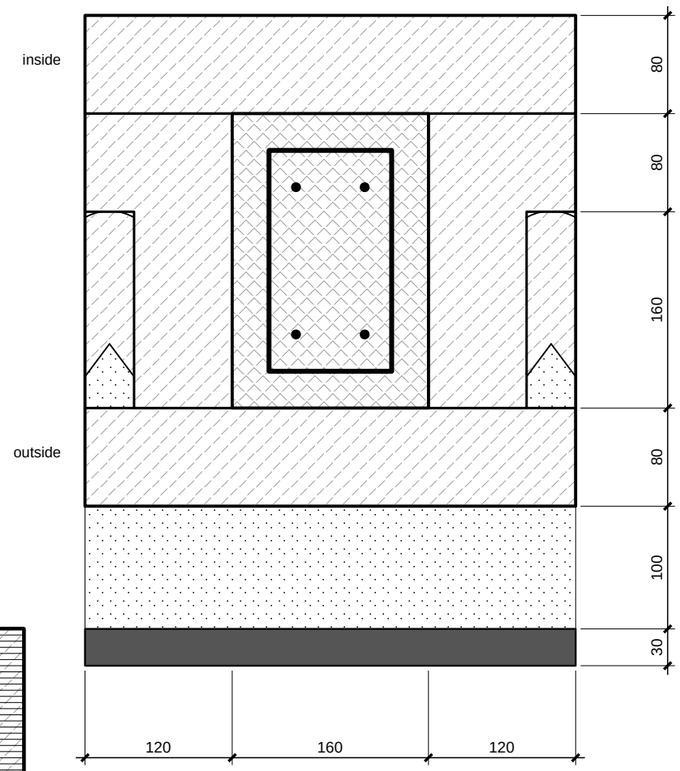

(1) Roof outer layer 80, printed with the rest of the piece; outside it the insulation 100 (dotted) and the outer layer 30 (dark).

(2) Zig-zag lattice 80 in a 160 zone; it touches the outer layer and layer 2 every @ 600; the cells between are open air pockets for ventilation.

(3) Layer 2, 80: printed bead; beside each rib it turns into the printed channel walls (see the plan cut).

(4) Inner layer 1, 80, room side. Layers 1 and 2 together are the structural leaf: 160 at the base, 80 at the crown (layer 2 ends).

(5*) Rib (cast column): channel 160 wide x 240 deep through layer 2 and the 160 zone, filled with poured concrete; section cut along the rib. It rises out of the solid base in the same pour, without a joint.

(6*) Rib bars R, 4 Ø16 (2 in the cut), anchored in the solid base where they cross the hooks of the wall bars A (assumed; steel fibre in the concrete could replace them).

(7*) Stirrups Ø8 every 200 (assumed).

(8) Solid base of the roof: the first 300 (vertical) above the eave is full cast concrete over the whole 400, no air zone, poured in one go with the rib above it; wall bars A hook into it. Replaces the ring beam.

(9) Buttress 400 wide, 1000 from the inner face (600 beyond the wall): printed formwork (80 end cap shown) filled with cast concrete; top flush with the roof base at +2.50.

(10*) Wall 400 printed, same pattern as the roof; wall bars A Ø16 run from the footing up into the solid base and end in a 160 hook (assumed). The roof grid is A or B (see the roof-grid sheets); the detail is cut along a rib.

* = assumed, to confirm

0 1 2 3 4 5 dm

Scale 1:10 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered