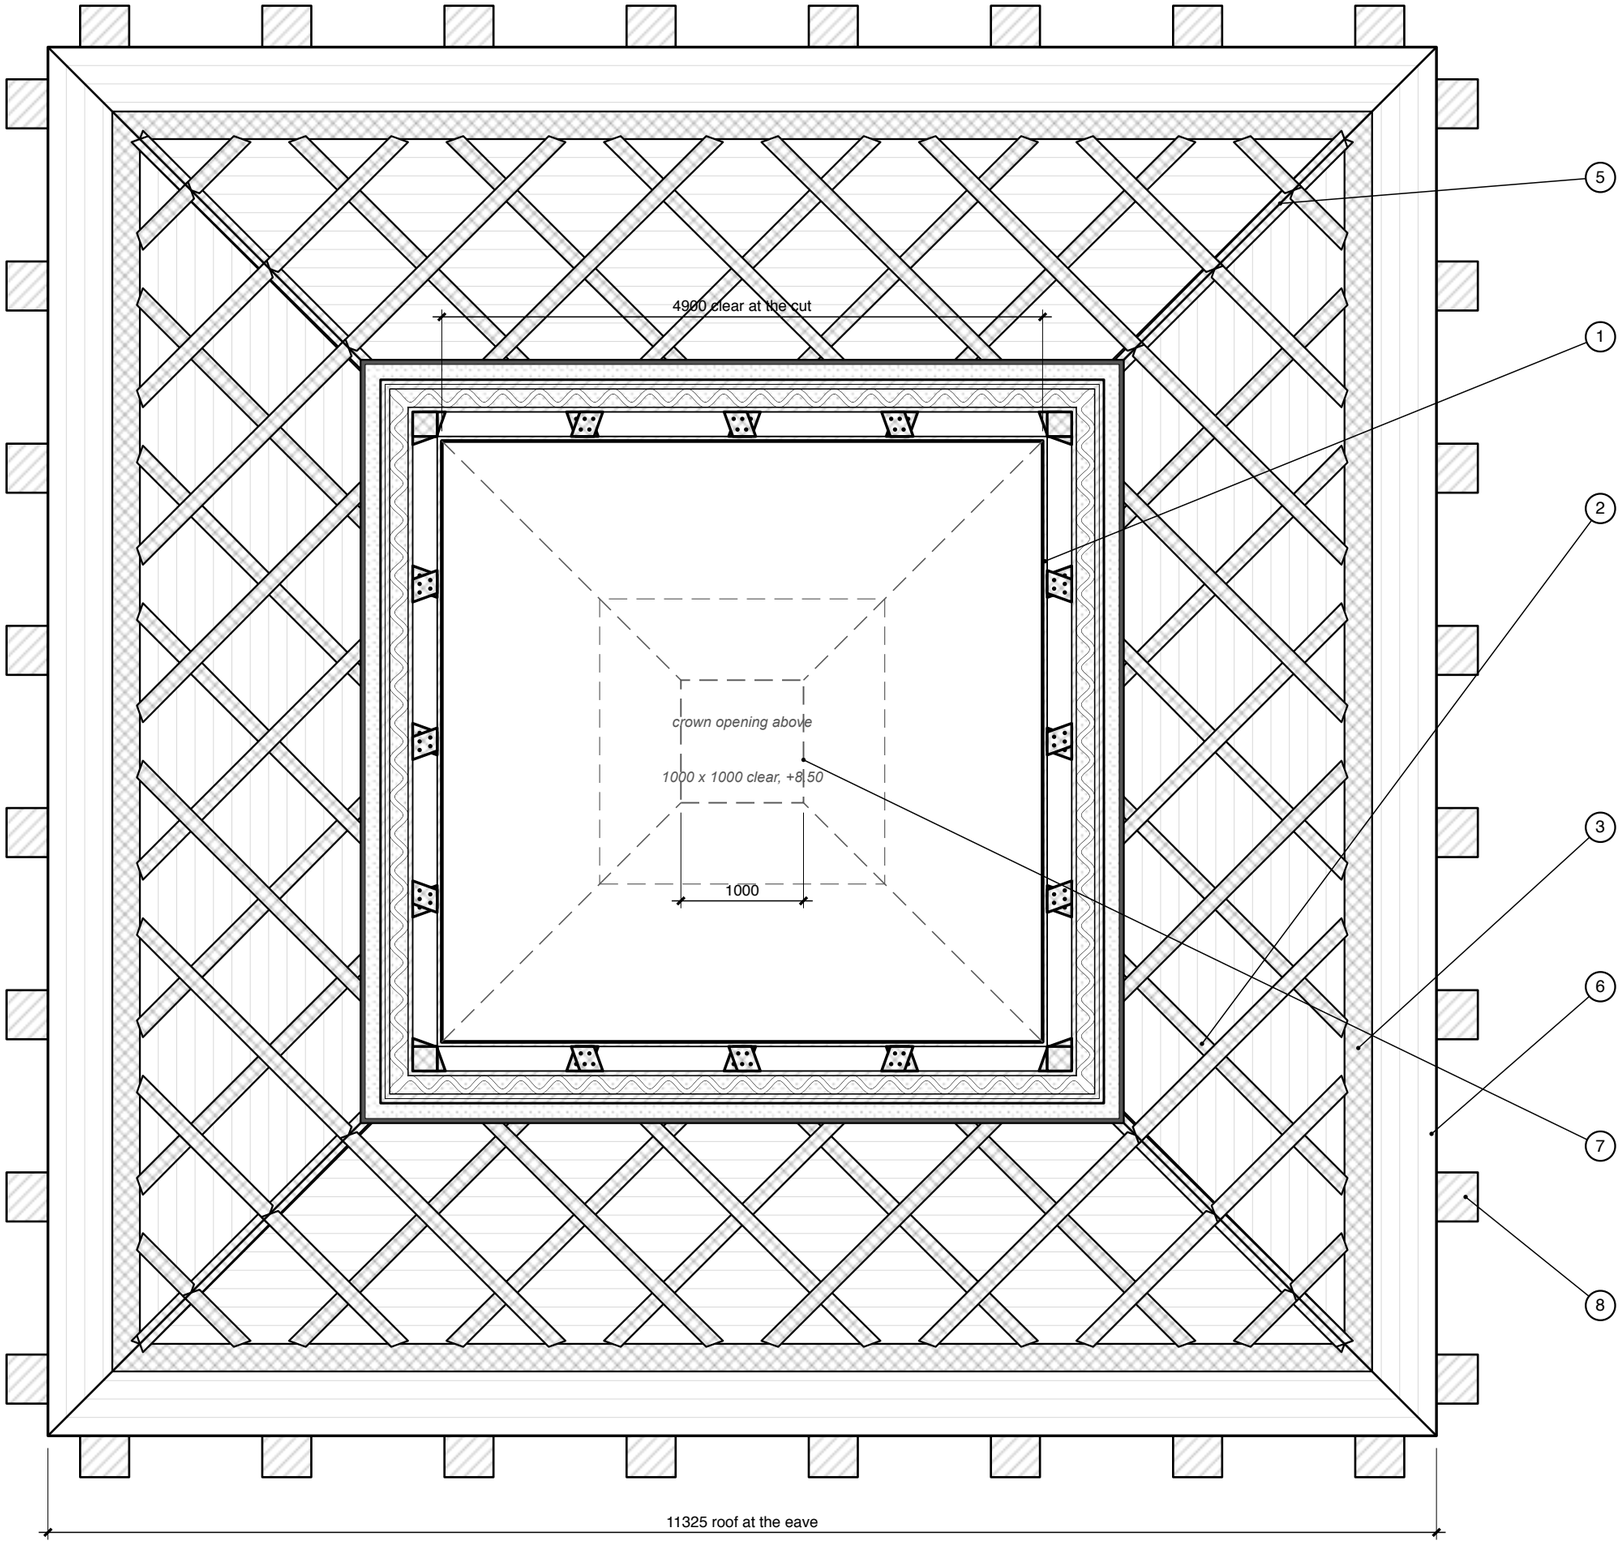

Roof plan, cut at +5.90 · grid B

horizontal cut through the roof, looking down on the ribs

1. Cut at +5.90 (3400 above the eave, just below the horizontal rib at +6.02), room side out: inner bead 30, rib zone 160 with the cast ribs cut (crossed hatch; empty cavity between them), middle bead 30, lattice zone 120 (wavy bead + insulation, dotted), 2 outer beads 30, insulation 100 and outer layer 30.
2. Ribs of grid B seen below the cut: the two families of diagonals from the base ring at the eave up to the cut and the hips.
3. Base ring: the 300 solid base at the eave (+2.50 to +2.80).
4. No horizontal ribs in grid B between the base ring and the top ring.
5. Hips: ribs from the corners of the eave up to the cut; dashed above it, up to the crown opening.
6. Roof edge at the eave (outside of the 30 outer layer). Very faint squares = printed layer joints (real layers 10, drawn every 200 in height).
7. Above the cut (removed, dashed): hips and the crown opening at +8.50, 1000 clear inside (1275 at the rib axis, 2325 outside the outer layer).
8. Buttresses below the roof: their ends show beyond the roof edge; the wall under the roof is dashed.

Notes

Matches the roof-grid elevations: same rib geometry, same levels (+4.26, +6.02, +7.68 for the horizontal ribs of grid A).

The ribs lie in the rib zone of the shell, between the inner and the middle bead; here they are drawn as if the middle bead, the lattice zone, the outer beads, insulation and cladding were transparent.

0 1 2 3 4 m

Pyramid roof · 3D-printed concrete · GSAPP

Scale 1:50 at A3 · dimensions in mm

2026-10-14 · hand estimates, not engineered