
Total section A-A

through the east and west mid-span buttresses, looking north

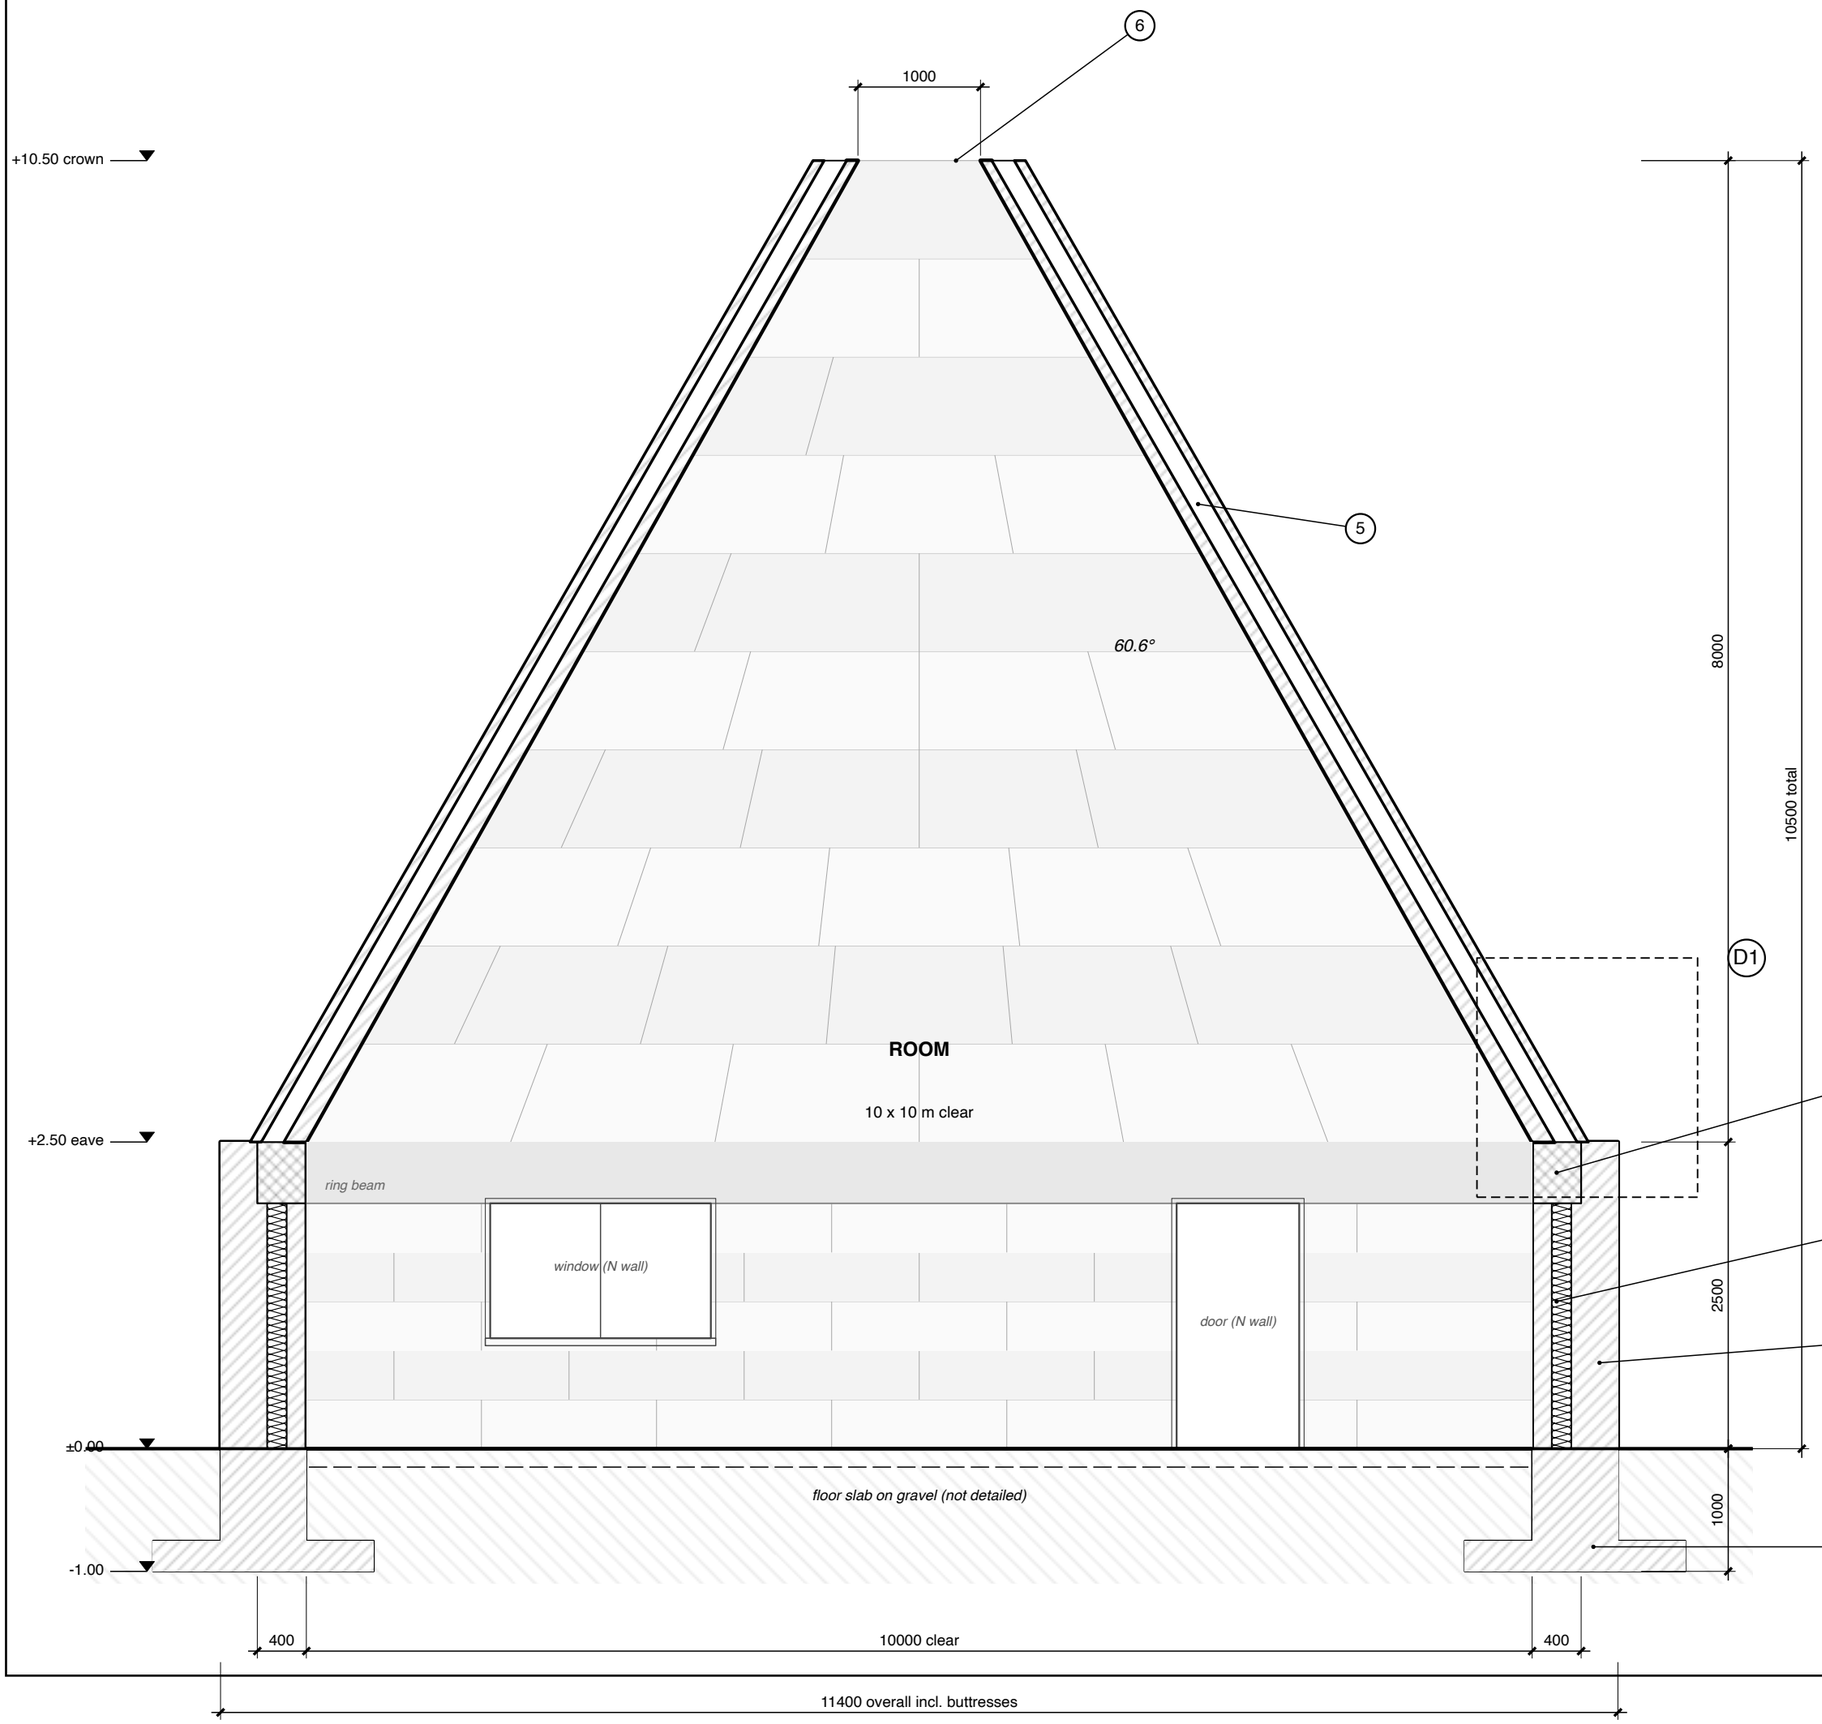

1. Footing 1800 x 250, underside at -1000 (frost depth and bearing are guesses).
2. Printed wall 400, same pattern as the roof: two 80 inner layers, a 160 air zone, an 80 outer layer.
3. Ring beam 400 wide x 500 deep, embedded in the buttress notch; top at +2.50, flush with the buttress top.
4. Buttress 300 wide, 700 from the inner face (300 beyond the wall), L-shaped around the ring beam: it rises to +2.50, flush with the roof base.
5. Roof shell: 400 thick square to the slope at the base (two 80 inner layers, a 160 air zone, an 80 outer layer), 320 at the crown; about 459 / 367 horizontally.
6. Crown opening 1000 clear; roof rises 8000 over 4500, slope 60.6°.

● from your sketches
○ assumed by me, to confirm

Notes

Layer pattern from your drawing; at the crown the second inner layer ends, so the leaf is 80 there (assumed).

The cut runs through the mid-span buttresses; the north wall with its door and window is seen beyond.

Faint grid on the back roof face and the north wall = printed pieces in running bond, about 1500 wide, 800 high on the roof and 440 on the wall (assumed sizes).

0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered