

Roof plan slices · grid B

horizontal cuts through the roof, looking down


cut at +6.00 (1:50)

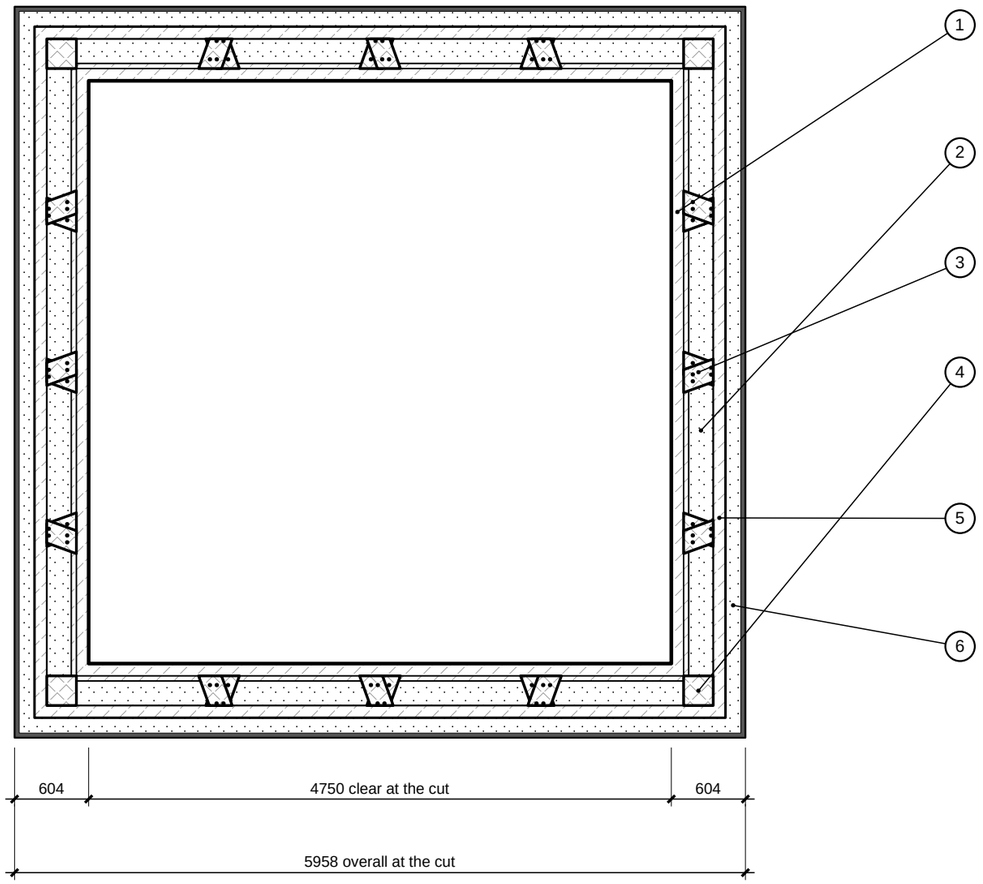

cut at +4.00 (1:100)

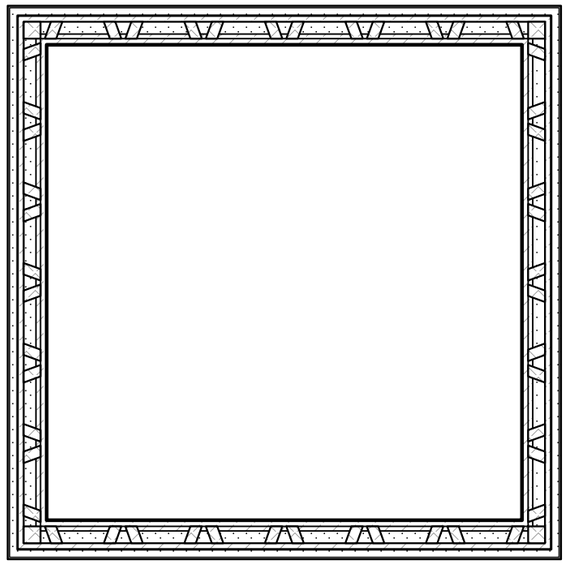

cut at +7.50 (1:100)



1. Inner layer 1, 80 printed, room side, then layer 2 (printed, thinner towards the crown).
2. Air zone, open between the ribs, for insulation (dotted).
3. Cast concrete cut by the plane (crossed hatch): the ribs, the two diagonal families of grid B, each 160 wide across the rib and 240 deep (the cut is longer than 160 and sheared where the rib is inclined in the face; 4 Ø16 and stirrups as in the rib section).
4. Corner blocks: the four hip ribs, cut across the corners (cast).
5. Outer layer 80, printed.
6. Insulation 100 (very thin line), then the outer layer 30 (dark).

● from your sketches
○ assumed by me, to confirm

Notes

Heights are levels from the ground floor (eave +2.50, crown +8.50). Large slice at +6.00 (3500 above the eave), 1:50, just below the middle horizontal rib of option A (+6.13); small slices at +4.00 and +7.50, 1:100.

Option B: the same two diagonal families at every height, clipped by the hips; the cut ribs move towards the corners as the roof narrows. At the crown (+8.50) only the hips and the top ring are left.

Layer 2 thins towards the crown (the leaf is 160 at the base, 80 at the crown). Ribs use the same geometry as the roof-grid sheets; bars and stirrups are assumed.

0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered