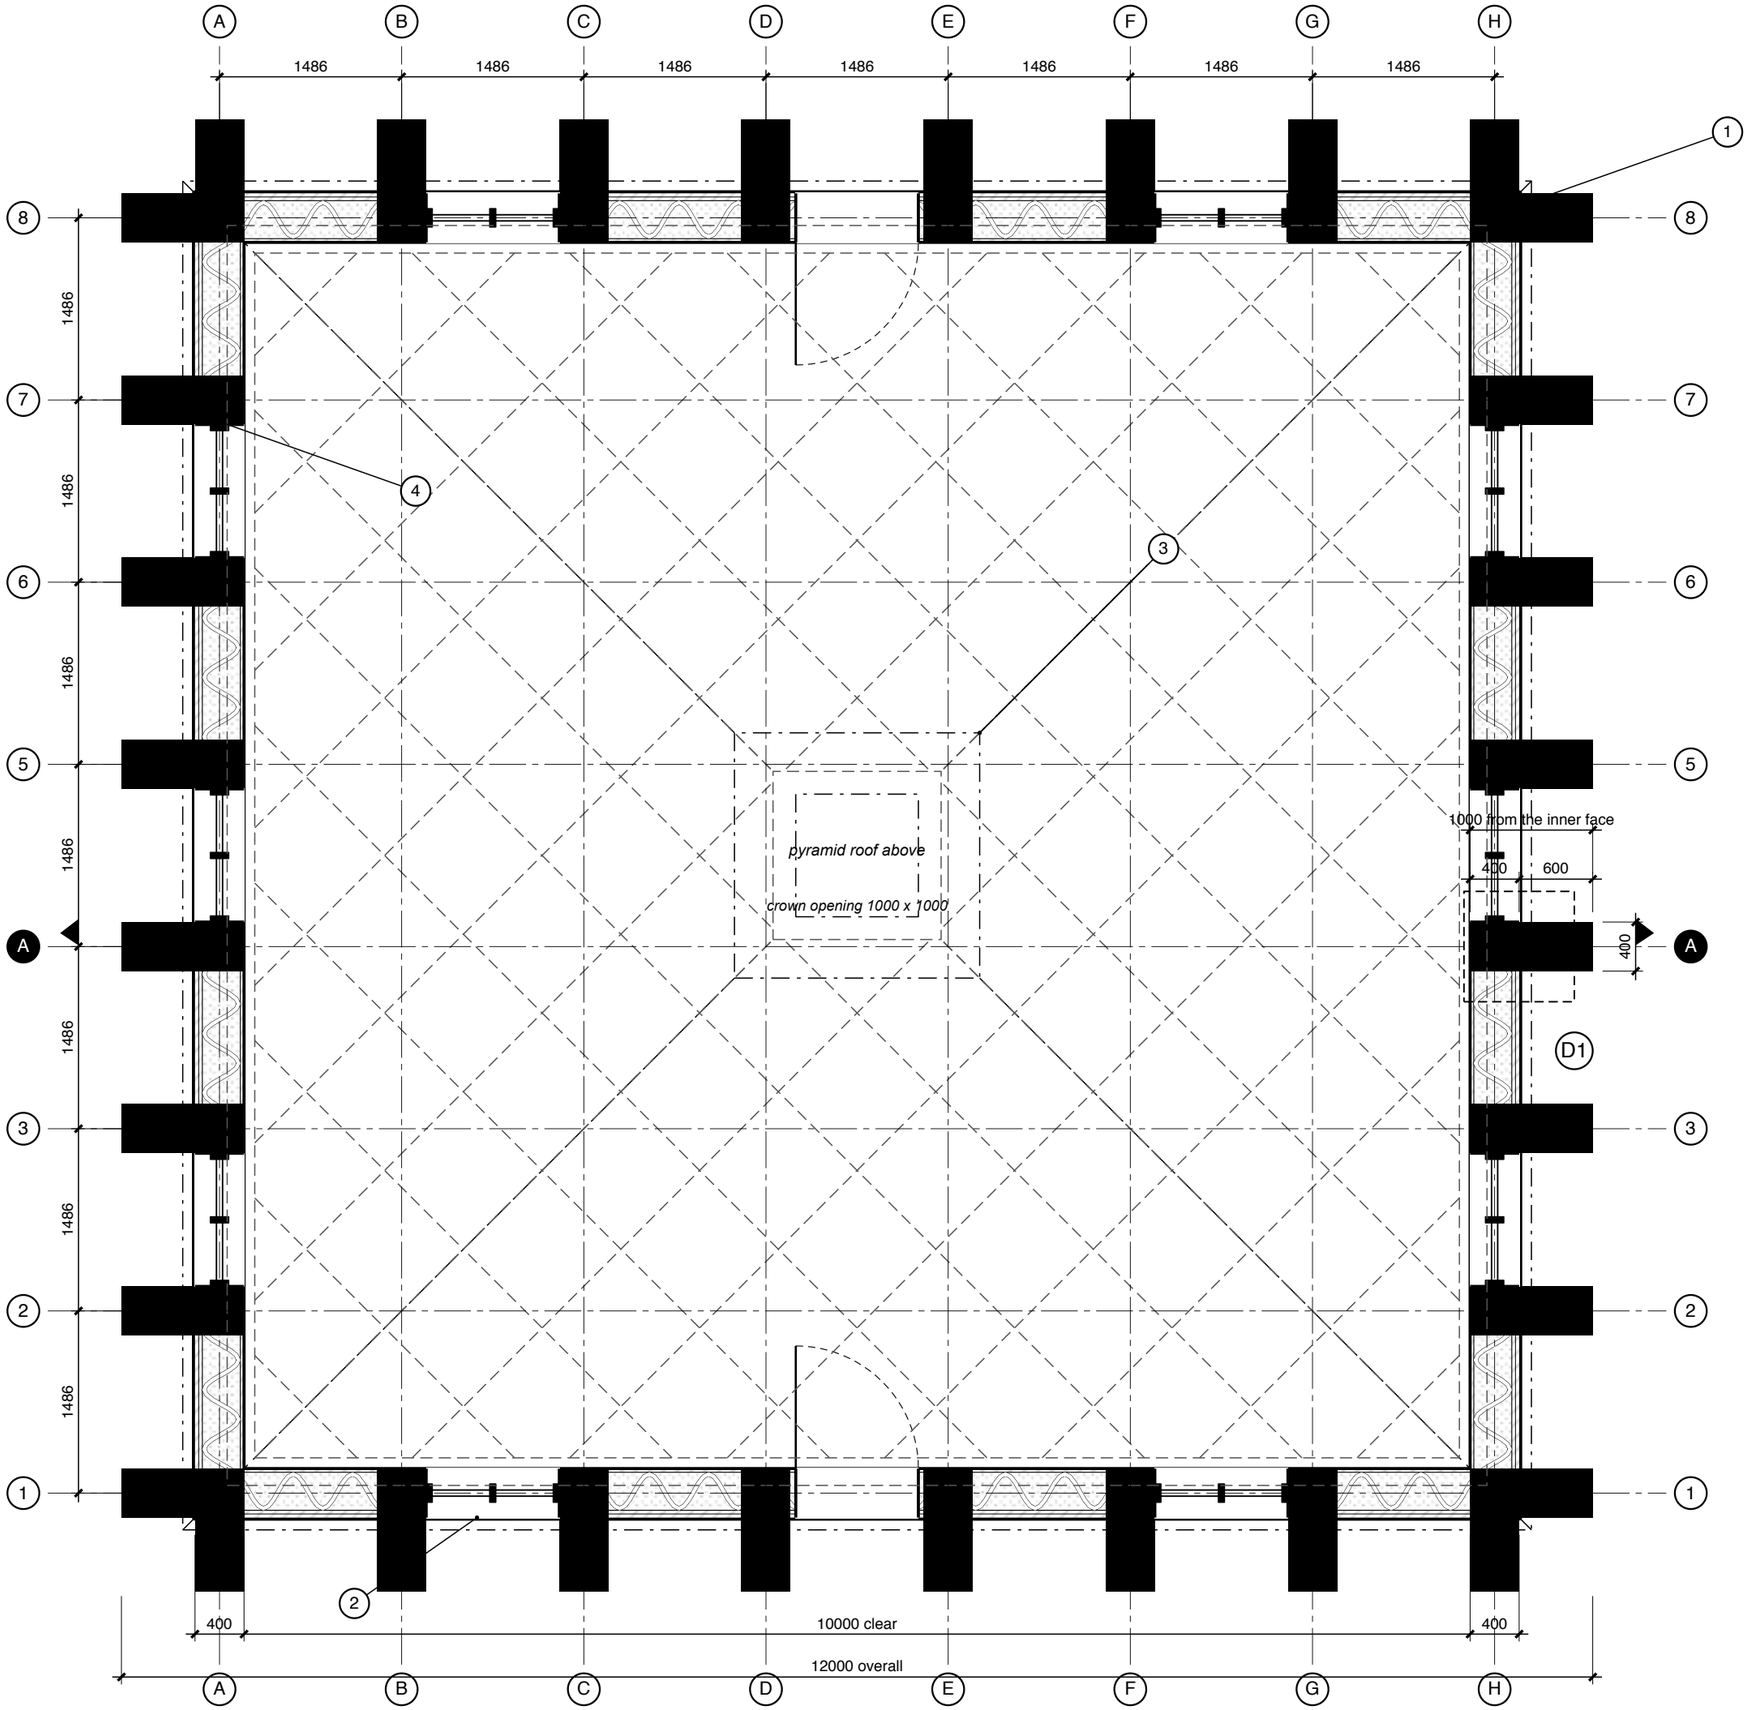


Floor plan · roof grid B

10 x 10 m clear · buttress every 1.5 m · printed walls

1. Printed wall 400 (= roof base width), room side out: inner bead 30, lattice zone 310 (wavy bead 30 with insulation between its loops, dotted), 2 outer beads 30. Buttresses solid black: 400 wide (same as the wall), 1000 deep from the inner face (flush with the wall inside), so they project 600 outside; one about every 1.5 m (7 bays of 1486 on the wall centreline, 8 per side, corners included).
2. Every other bay (the 2nd, 4th and 6th) is a full-height curtain wall, the whole bay between two buttresses; the middle bay of the south and north walls has a 1000 door instead. The other bays stay printed wall. Positions and sizes are placeholders.
3. Pyramid roof above (dashed): 1000 x 1000 clear crown opening, hips to the corners; the roof is 400 thick square to the slope from eave to crown, so the shell ends 100 outside the wall face; the outer beads are exposed concrete (no cladding).
4. Buttress axes 1486 apart along each wall (centre to centre), corners included.
5. Cast ribs of roof grid B seen from above (dashed), with the bottom ring (the 300 solid base) and the horizontal / top rings.

Notes

Section A-A cuts through the 4th buttress from the south on the east and west walls (y = -743).

Detail D1 is the eave at the east buttress on that cut.

0 1 2 3 4 m

Pyramid roof · 3D-printed concrete · GSAPP

Scale 1:50 at A3 · dimensions in mm

2026-10-14 · hand estimates, not engineered

03